Termination

WV-3G-50W-PTER-4310M01

Product Feature

- High Reliability
- RoHS Compliant
- DC ~ 3000MHz System

Electrical Specifications

Frequency Range	DC ~ 3000MHz
VSWR	1.15 : 1 Max
Power	50W CW Max
PIMD	160dBc Min @ 2x43dBm Input
In/Out Impedance	50 Ohms Nominal

Environmental Specifications

Operating Temperature	-35°C to +50°C

Mechanical Specifications

Dimension	188.9 x Φ90.0 (mm)
RF Connector	4.3-10 Male Connector
Connector Position	See Outline Drawing
Finish	Black Color

Termination
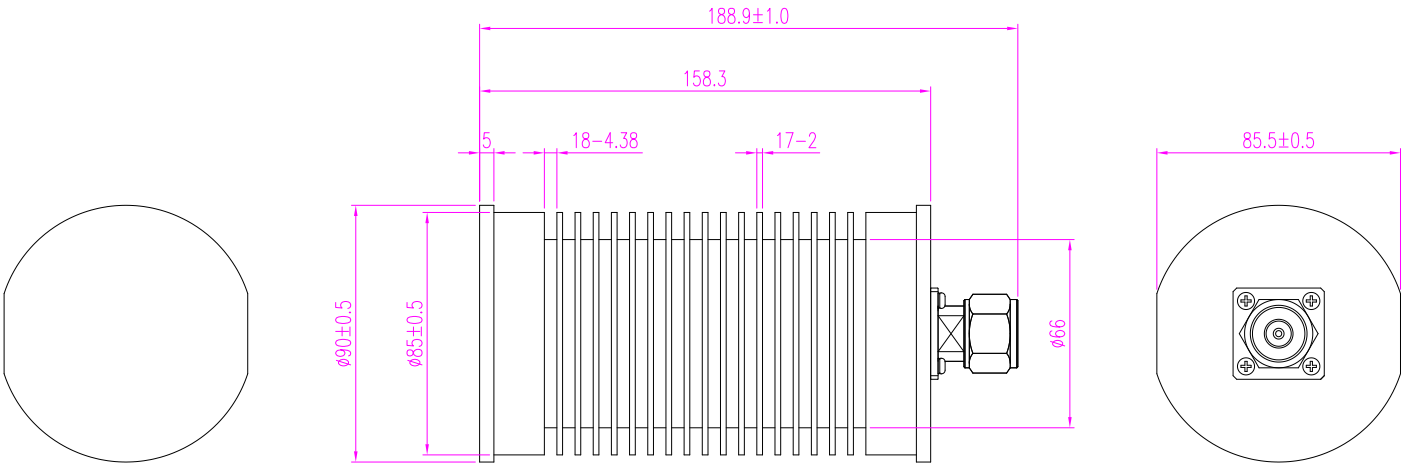
Outline Drawing