Circulator

WEVERCOMM
wever communication co., ltd.

WVQ-1060M-60BW04

Product Feature

- High Reliability
- RoHS Compliant
- 1030MHz~1090MHz System

Electrical Specifications

Frequency Range	1030 ~ 1090MHz
Insertion Loss	0.3dB Max
Isolation	18dB Min
Return Loss	18dB Min
Average Power	200W CW; 1200W Peak
Transmission Direction	Clockwise
In/Out Impedance	50 Ohms Nominal

Environmental Specifications

Operating Temperature	-40°C to+85°C
Storage Temperature Range	-55°C to+125°C
Application	Airborne

Mechanical Specifications

Dimension	25.4 x 25.4 x 10.0 (Unit:mm)	(Tolerance : ±0.2mm)
Mounting Points	See Outline Drawing	
RF Connector	RF Port : Drop In	
Connector Position	See Outline Drawing	

Circulator
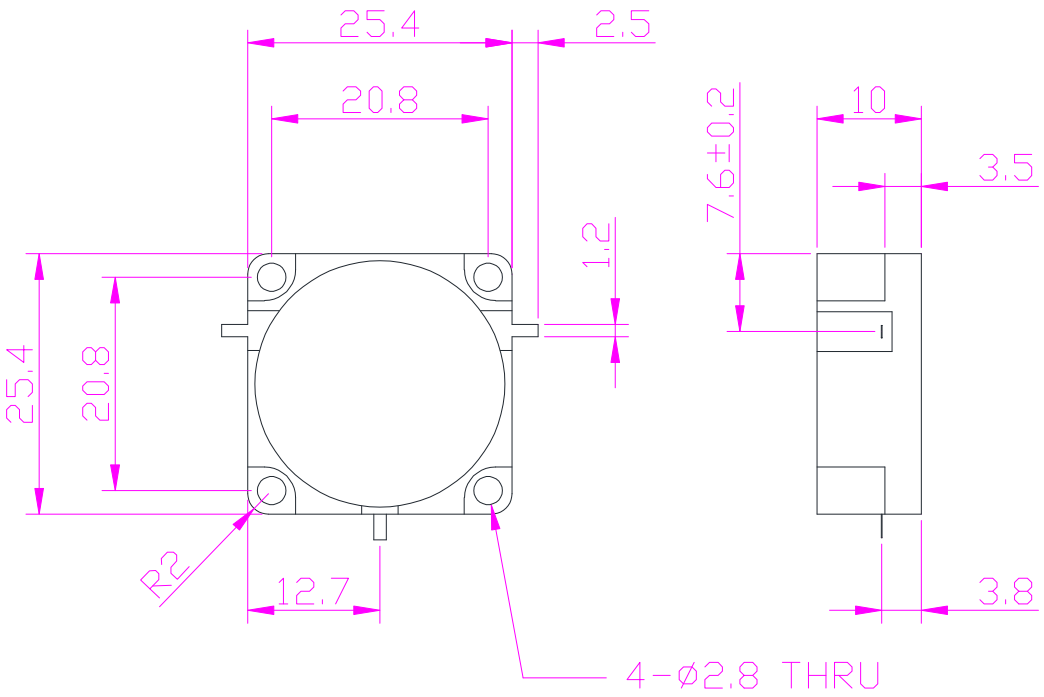
Outline Drawing