Circulator

WVQ-3G-2GBW02

Product Feature

- High Reliability
- RoHS Compliant
- 2GHz~4GHz Band System

Electrical Specifications

Frequency Range	2GHz ~ 4GHz
Insertion Loss	0.6 dB Max
Isolation	16 dB Min
VSWR	1.4:1 Max
Average Power	10W CW Max (design assurance, to be verified by customer)
Transmission Direction	Clockwise
In/Out Impedance	50 Ohms Nominal

Environmental Specifications

Operating Temperature	-30°C ~ +70°C

Mechanical Specifications

Dimension	32.0 x 34.0 x 18.0 (Unit: mm)
Mounting Points	See Outline Drawing
RF Connector	N Female Connector(NK)
Connector Position	See Outline Drawing

Circulator
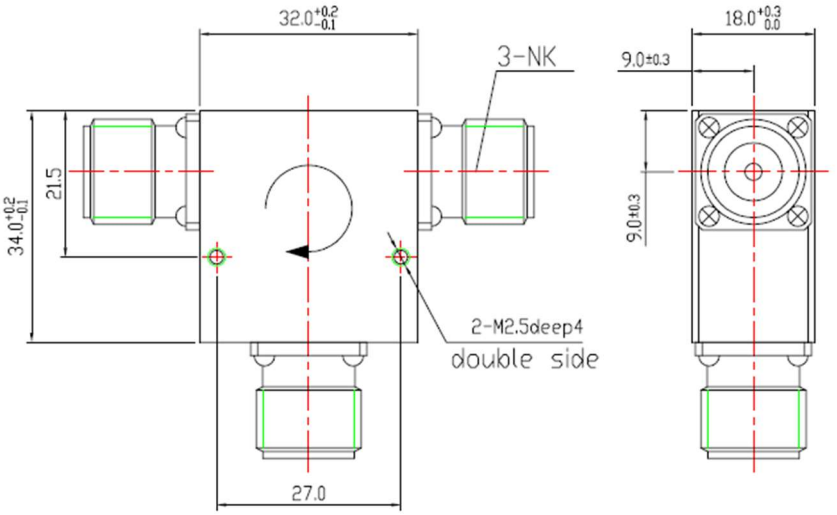
Outline Drawing